


# Commander Universal Panel Mount Phone

The Universal Commander phone meets all safety standards by providing the built-in features necessary to promptly connect, identify, and respond to calls for assistance.

The momentary press of the phone activating button puts it all into motion...

An automatic dialer is provided to dial out to an auxiliary location. In buildings that are not manned 24/7, multiple phone numbers can be programmed that will sequentially cycle through if there is no answer or a busy signal is detected. The recordable voice message is used to identify location and provide any dispatch and/or other information specific to the site. Automatic shut-off ensures units are always ready for the next call.

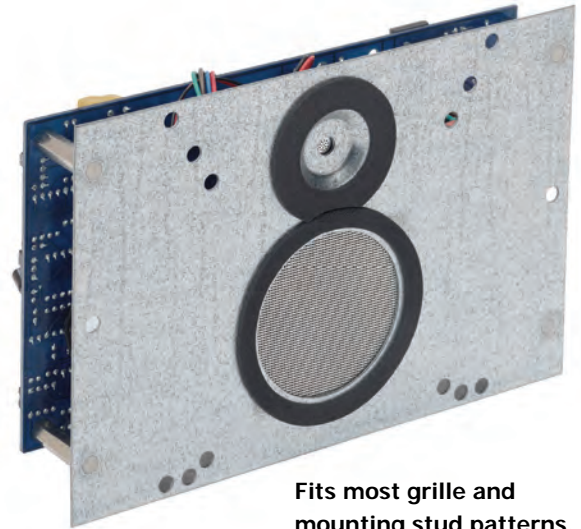

**Fits most grille and mounting stud patterns.**

## Features

- Vandal Resistant
- Hands-free Speakerphone
- Five number automatic dialer
- Built-in keypad & remote programming
- Automatic & programmable shut-off
- Non-volatile memory
- Visual indicator
- Two voice announcement messages
- Voice prompted programming
- Automatic answer & shut-off
- Uses remote button (not included)
- Weather Protected Option

## Applications

- Elevators
- Wheelchair Lifts
- Areas of Rescue
- Parking Garages
- Hallways
- Poolside
- Entry
- Security
- Campus
- Gated Areas
- Hospitals
- Safety Compliance
- Government Buildings
- Airports
- Malls



# Commander Universal Panel Mount Phone

Communications

| Specifications                                      | K-Phone ET401 | SUREphone ET901 |
|---|---------------|-----------------|
| <b>Analog Phone Line</b><br>24-51 VDC 30 mA         | •             |                 |
| 24-51 VDC 20 mA                                     |               | •               |
| <b>Power Requirements</b><br>Phone line             | •             |                 |
| 120 VAC 50 mA (includes battery backup)             |               | •               |
| <b>Wiring</b><br>20 AWG shielded twisted pair       | •             | •               |
| <b>Approvals</b><br>FCC (US), IC (Canada)           | •             | •               |
| UL (US), CSA (Canada)                               | •             | •               |
| ADA (US)  | •             | •               |
| ASME A17 (US), B44 (Canada)                         | •             | •               |
| <b>Number of Phones per Phone Line</b><br>One phone | •             |                 |
| One to ten phones (independently addressed)         |               | •               |
| <b>Intercom Option</b> (SUREcom ET92)               |               | •               |
| <b>Weather Protected Option</b>                     | •             | •               |

| Dimensions     | Fits behind 2.5 (In) / 63.5 (mm) or larger grille pattern | Weight              |
|----------------|---|---------------------|
| Standard Size: | 4.75 H x 7 W x 1.5 D (In)<br>121 H x 178 W x 38 (mm)      | 1.5 Lbs.<br>0.68 Kg |

| Part Numbers   | Options                     | Accessories            |
|--|-----------------------------|------------------------|
| ET401A-OEMU-3  | Add -WP Weather Protected * | ET-SP Surge Protector  |
| ET901A-OEMU-3  |                             | ET-92 SUREcom Intercom |
| *Weather protected option includes: Conformal coated circuit board, soldered connections and sealed contacts, water proof speaker and microphone |                             |                        |
| Other styles available for Flush, Phone Box and Surface mounting.  |                             |                        |

Specifications subject to change without prior notice.

K-Tech International, Inc.  
56 Ella Grasso Ave.  
Torrington, CT 06790

Phone: 800-993-9399 or 860-489-9399  
FAX: 860-489-4399  
Www.KTechOnline.com